



ENC 201 Series

Fire Alarm Filters For Medical Shielded Enclosures

Electrical Characteristics

Nominal voltage	see table
Test voltage (phase to phase)	1000 V _{DC} (2 s)
Test voltage (phase to ground)	1000 V _{DC} (2 s)

Model	Nominal Voltage 0 – 60 Hz	Nom. Curr. [A] at TA=40°C	Case
ENC201	120 V _{AC}	1	1


Attenuation

Model	14 kHz	1 GHz
ENC201	> 100 dB	> 100 dB



Mechanical Dimensions in mm

Case 1

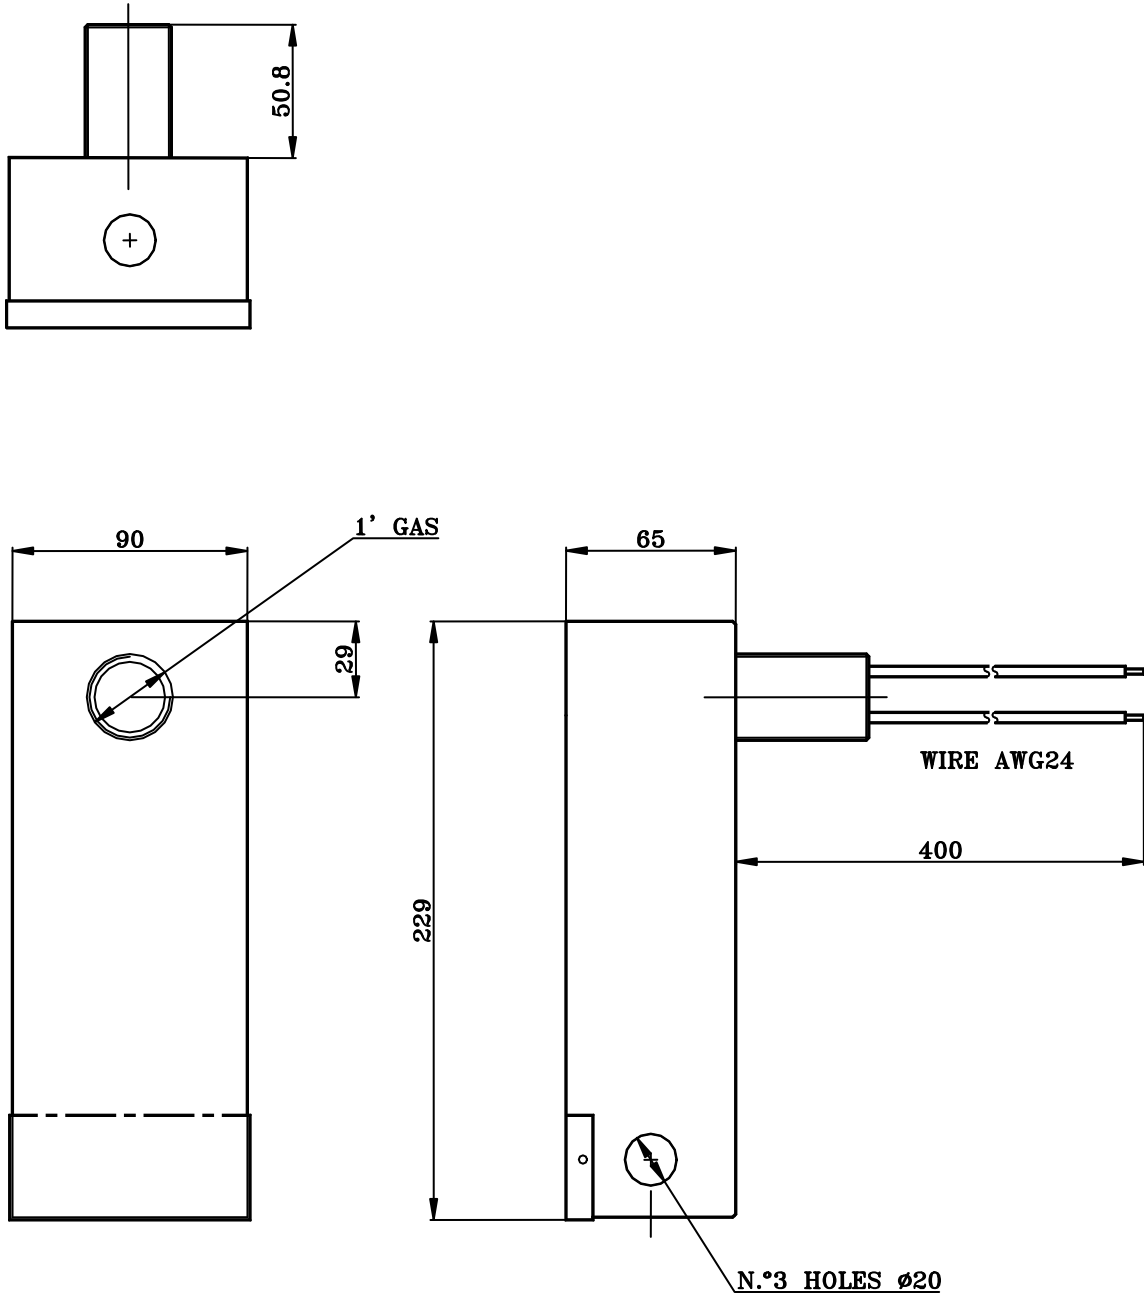

All dimensions are in mm.

